



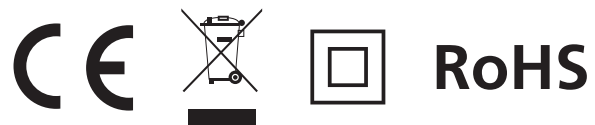

LED Ceiling Lamp





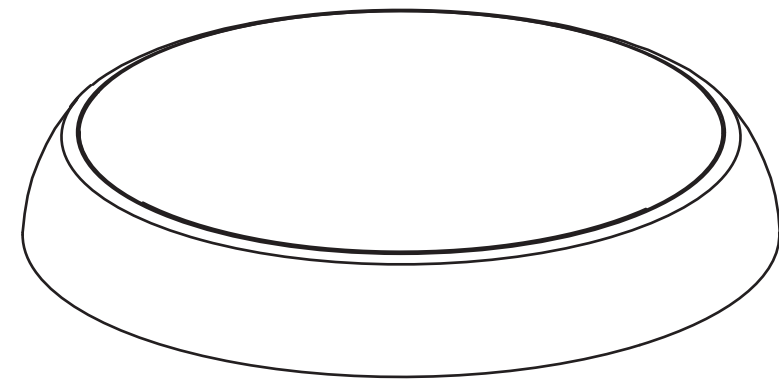


Product Item	847301		
Wattage	12W		
Lumen	1200lm		
Color Temperature/CRI	3000-6500K , > 80		
Life Time	30000h		
LED chips and Qty	2835 91pcs		
Material	Diffusion PC Cover	PC Base	
Working Voltage	No-Isolation Driver	220~240V	50/60Hz
Working Temperature	-20°C~40°C		
Power Factor	>0.9		
Size for Product(W*H)	Φ320X82.5MM		







black
score dimension 148 x 210 mm

black
score dimension 148 x 210 mm

LED Ceiling Lamp

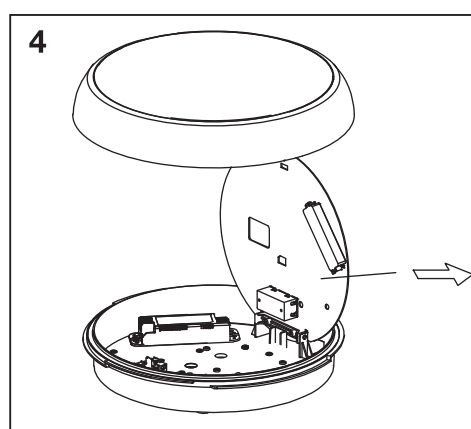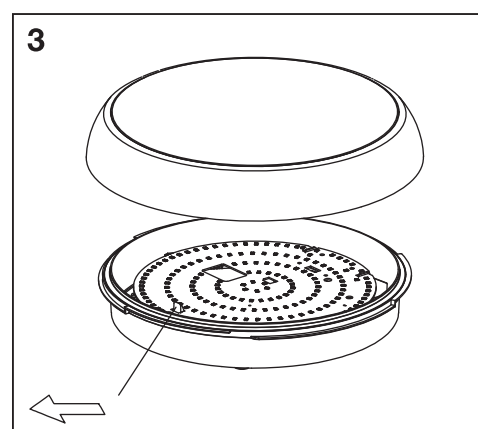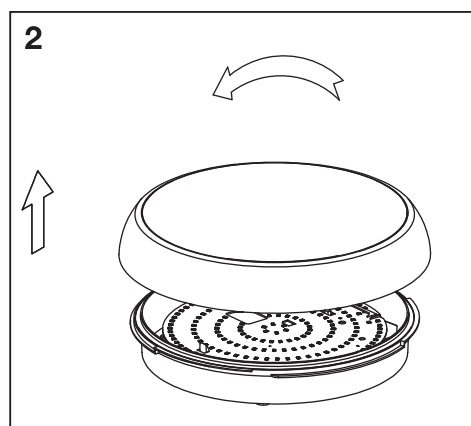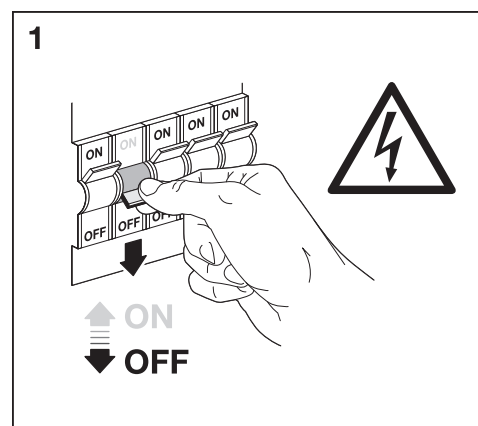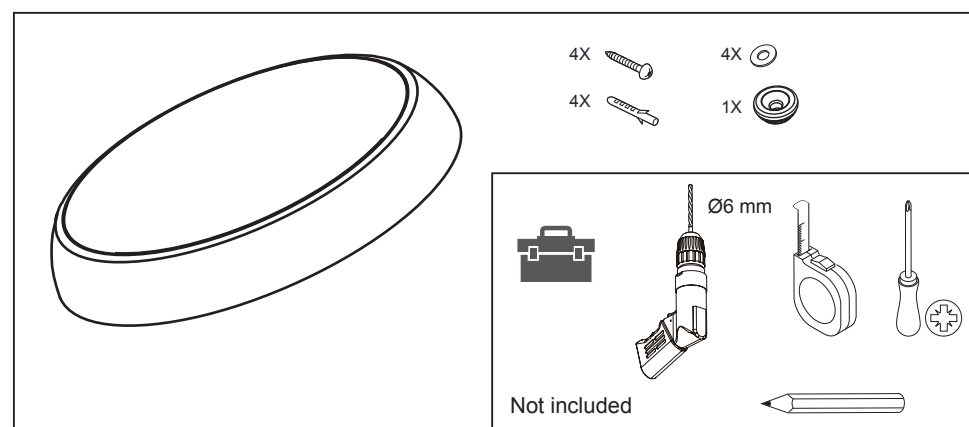

LED Ceiling Lamp

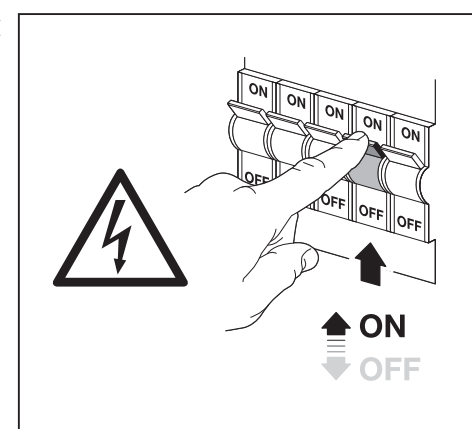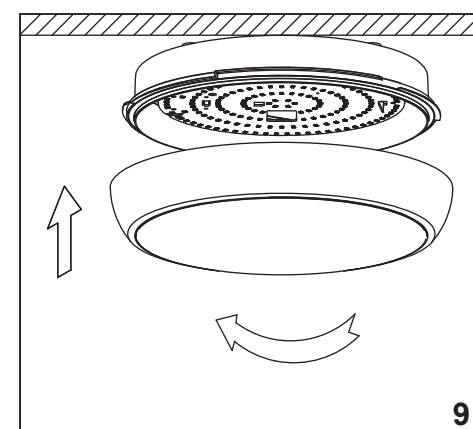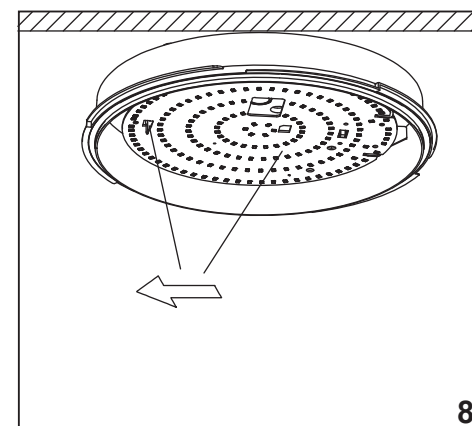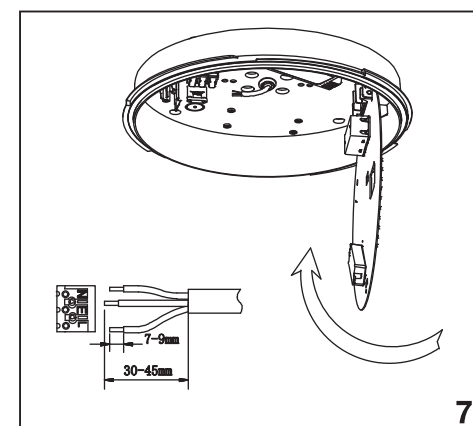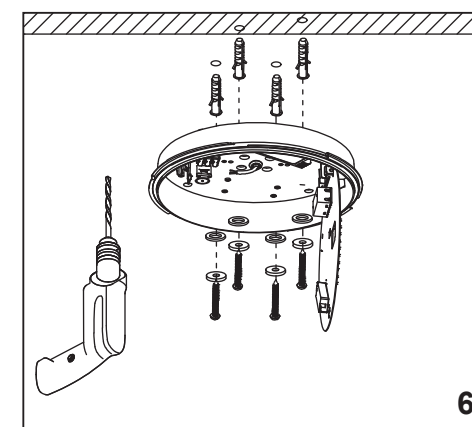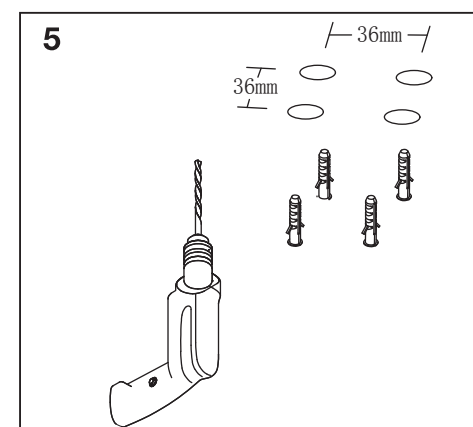

*1 TC (color temperature selection) series, you can adjust the shown switch to choose the color temperature.



LED Ceiling Lamp

Dusk/Dawn Sensor

DC input , Rod antenna


HD016VCR 3

- 1. Automatic On/off control with Daylight sensor.
- 2. DC input
- 3. Compact sized particularly suitable for Tri-proof light.
- 4. 5 year warranty.



Detection coverage


Typical installation height 2.5-4m
This figure indicates the maximum distance at the highest mounting height with 100% sensitivity.

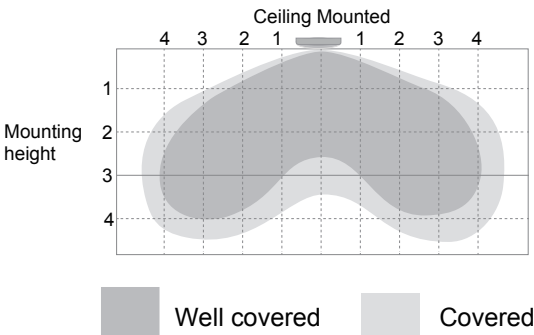


Technical data

Operating voltage	10-15VDC
Output	PWM
Stand-by power	≤0.5W
Detection area	50%/ 100%
Hold time	5s/30s/1min/10min
Daylight threshold	2Lux/10Lux/50Lux/ Disable
Stand-by period	0s/ 30s /20min/+∞
Stand-by dimming level	10%/20%/30%/50%
Microwave frequency	5.8GHz±75MHz
Microwave power	<0.3mW
Mounting height	2.5-4m/8.2-13.12ft (ceiling mounted)
Detection range	ø4-10m/13.12-32.8ft (ceiling mounted)
Operating temperature	-20°C~+60°C
Motion detection	0.5~1.5m/s
IP rating	IP20
Warranty	5 years

Mechanical structure

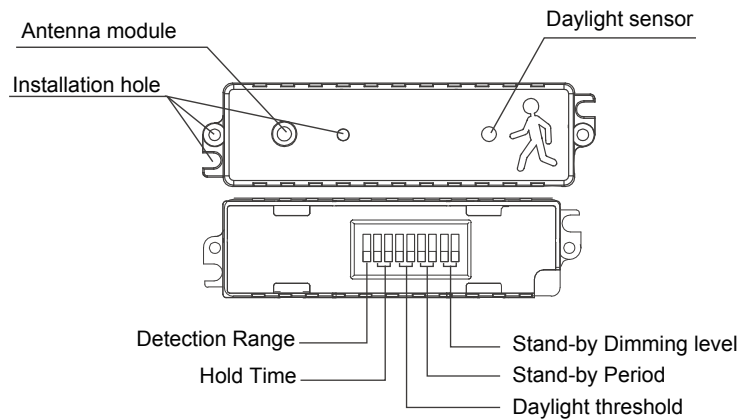


Settings

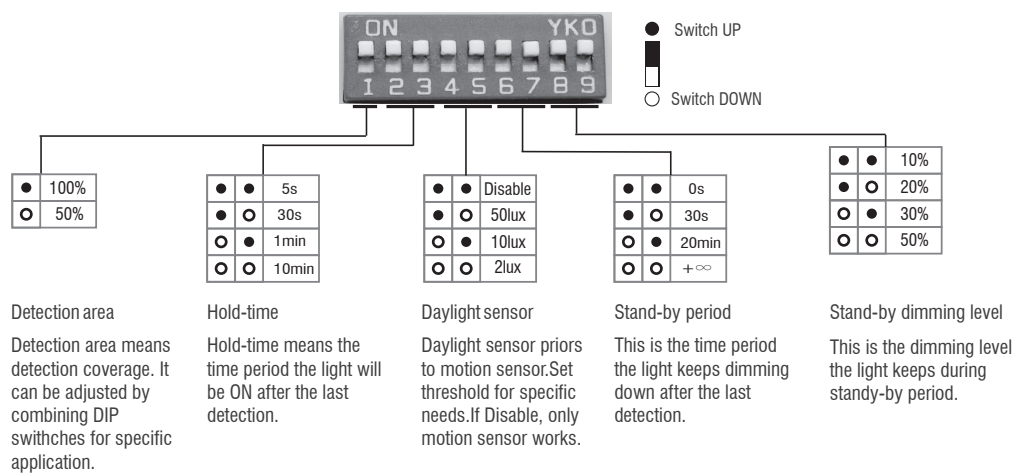

Application

1. Automatically ON/OFF function:

Light on when detect movement and off after people leave at night. Applications: Corridor, Staircase.

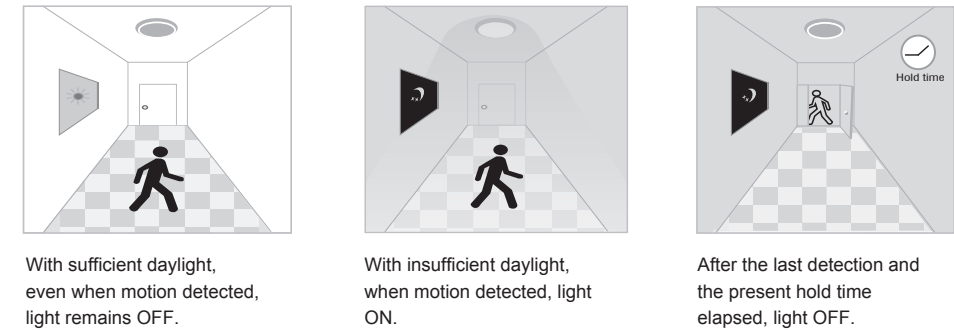


2. No daylight function

The daylight threshold is set to "Disable".

Light on when detect movement, After people leave, Light off after stand-by period.

Applications: Dim places such as Basement Parking, Underpass.

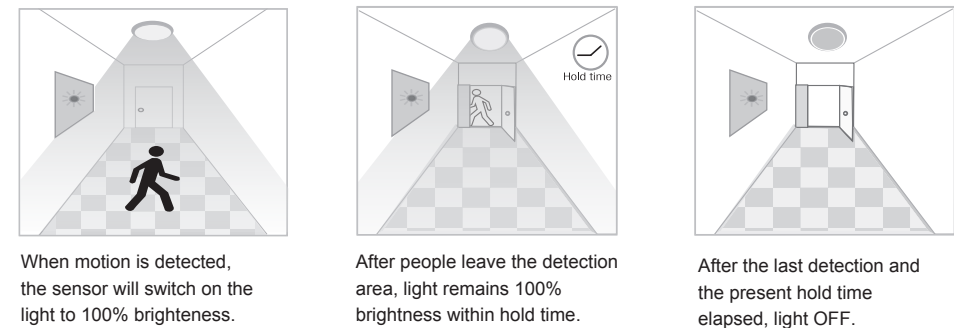

3. Function Demo - Dimmable control/Corridor function

